

JMS AG
 Jet Maintenance & Service
 Rainer-Haungs-Strasse 42
 77933 Lahr/Germany
 Phone +49 (7821) 9 94 69 – 0
 Fax +49 (7821) 9 94 69 – 100




Internet: <http://www.jms.aero/>
 eMail: <mailto:sales@jms.aero>

HRB 705130 Amtsgericht Freiburg i.Br.
 VAT Reg No/USt.-IdNr.: DE270217003

Doc. No. TDS J-TOW767_R01.docx

Datasheet:

p/n: J-TOW767

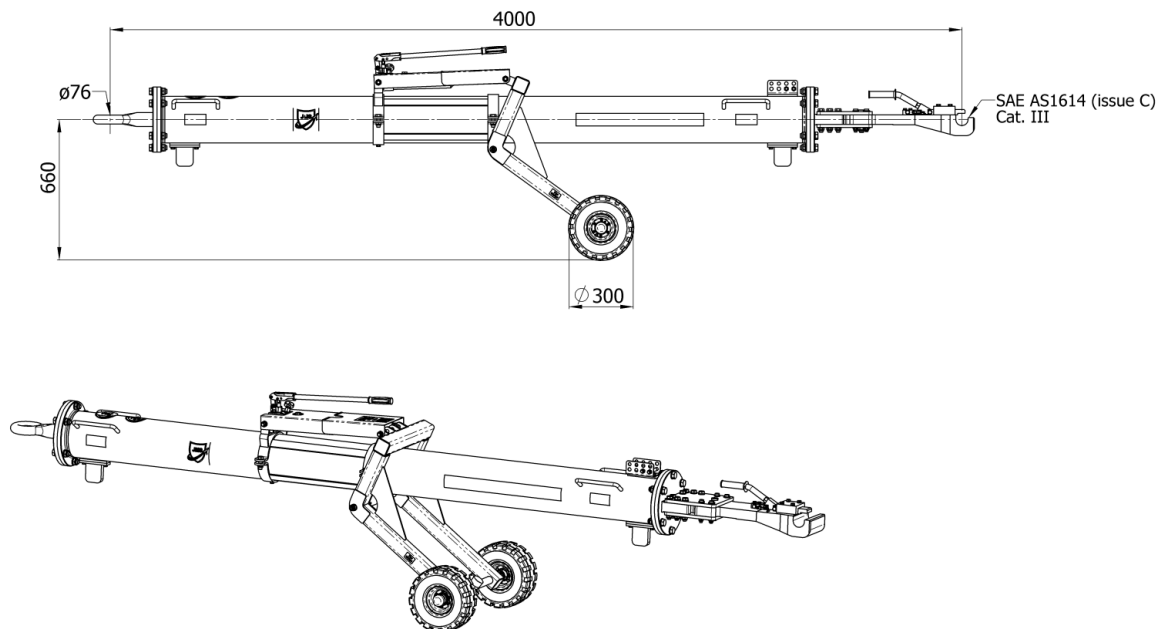

Standard features:

- Push/Pull and torque shear pins, replaceable without using tools.
- FOD-Protection device:
No shear pin debris will be lost in case of shear pin fracture!
- 6 spare shear pins included
- Retaining pin
- Automatic locking mechanism
- Air-inflated tires
- Hydraulically height adjustable undercarriage
- Steel tube
- Skydrol resistant paint
- Standard colors: yellow RAL 1007 (tube), black RAL 9004 (undercarriage)

Aircraft application:

- B767

Shipping information incl. packing:

Approx. Weight	Approx. shipping Dims l x w x h	Approx. Volume
[kg]	[mm]	[m³]
355	4200 x 1000 x 760	3,2
[lbs]	[inch]	[ft³]
782	165 x 39 x 30	113

Options (at extra charges):

- Puncture-proof tires
➔ Option R3
- Floating axle
➔ Option AV
- Revolving tow head $\pm 10^\circ$
➔ Option AD
- Revolving tow eye
➔ Option AP
- Revolving tow eye with shock absorber
➔ Option AA
- Customized color for towbar tube i.a.w. RAL coding scheme
➔ Option A-RAL

Documentation:

- Technical manual
incl. illustrated spare parts list
- COC Certificate of Conformity
- CE Declaration of Conformity (if applicable)

Net weight:

- 290 kg / 639 lbs

Shear pins:

- 20-00230-0020-322 "L1" Push/Pull and Torque
- 00.40060.0008 "L-FB" Retaining pin

We reserve the right to update this datasheet at any time w/o prior notice